

# Intrinsic Safety Barrier

Universal




# MD-U1

## Universal Intrinsic Safety Barrier



- Support 1 Channels
- 24 VDC Supply
- Analog Signal Type
- Modbus RTU, RS-485 Interface
- Connection with Screw Terminals
- Thermocouple, RTD, Voltage Input, Current

## Product Features

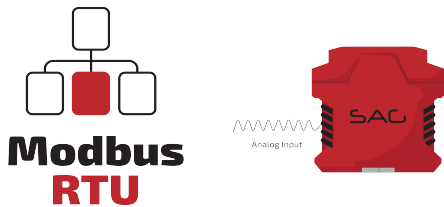


**MD-U** is a universal temperature intrinsically safe barrier that can measure analog signals and be configured with the Modbus protocol, which is done with an integrated CPU platform. It is available in 1-2 or 3 channels, with a 35 mm DIN mounting rail acc.


The SAG **MD-U** is a multi-function barrier that can measure temperature, voltage and current. It supports a variety of temperature sensors, including 2-3-4- wire RTDs from PT10 to PT1000. It can also read different types of Thermocouple sensors (B, E, J, K, L, N, R, S, T-type). In addition to temperature, it can measure a wide span of voltage from -10 to 10 volts. And one of its channels can read current in the range of 0-20 mA and 4-20 mA. Furthermore, the data collected from electrical devices in hazardous areas is transmitted to the safe area via the MODBUS Protocol, with a bit rate up of to 115.2 kbps for Monitor/ Configuration. This allows for remote monitoring at a safe distance.

# Front View

- 1. Analog Input : Channel 1
- 4. RS-485 Terminal
- 10. Power Supply Terminal
- 4. Fault LED Channel 1
- 7. Power LED
- 8. Communication LED

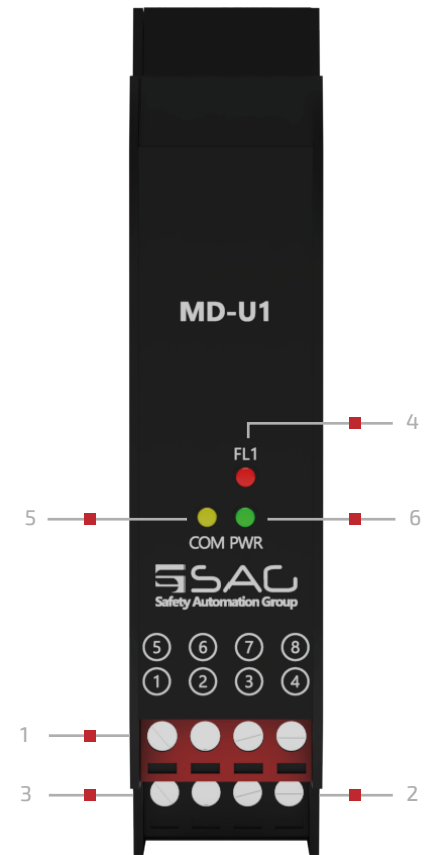

# Connection View

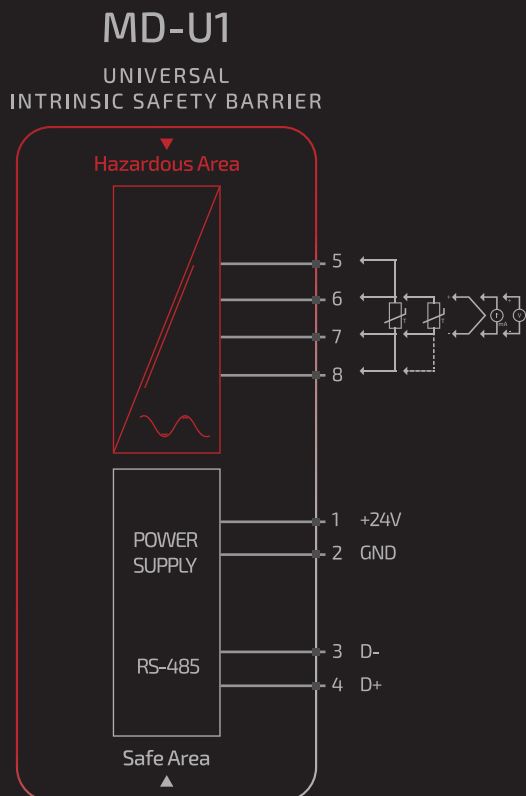

## MD-U1 PIN Configuration

1. +24VDC	5. Channel 2
2. GND	6. Analog Input
3. RS-485 (D-)	7. RTD,TC,Voltage
4. RS-485 (D+)	8.

## TECHNICAL DATA

MD-U1

### GENERAL SPECIFICATION

Signal Type Analog Input

Number of Channels 1 Channel

### SUPPLY

Rated Voltage 24 VDC Nom (20-30 VDC) Reverse Polarity Protected

Connection Terminal 1 PIN 1(+24 VDC), Terminal 1 PIN 2 (GND)

Power Dissipation < 1 W

Current Consumption Approx. 208mA

Max. Power Consumption 5 W

### INPUT

Input Thermocouple, 2-3-4 Wire RTD, Voltage, Current

Connection Terminals 2,3,4

Rated Values -

Integration Time 400 ms

Input Range  $\pm 500$  mV (TC/mV), 0-4 k $\Omega$  (RTD/res), (sink, -10 to 10 volts), (sink 0-20mA)

### RTD

RTD (PT10,PT50,PT100,PT500,PT1000)

Type of Measuring 2,3 and 4 Wire

Measurement Loop Monitoring Sensor Breakage

Measuring RTD Current 323  $\mu$ A

### THERMOCOUPLE

Thermocouple B, E, J, K, L, N, R, S, T – Type (IEC 584-1: 1995)

Cold Junction Compensation Internal

Measurement Loop Monitoring -

### VOLTAGE

Range 0 ... 10 V, 2 ... 10 V, 0 ... 1 V, -100 ... 100 mV, -10 ... 10V

Resolution -

### CURRENT

Range 0 ... 20mA, 4 ... 20 mA

Resolution -

## TECHNICAL DATA

MD-U1

### DEVIATION

RTD	Max 0.1% of Span
Thermocouple	Deviation of CJC: $\pm 0.8$ K
Voltage	0.1 % of Span
Current	0.02%

### DATA CONNECTION

Modbus RTU	RS-485 connection up to 115.2 kbps for Monitor/ Configuration
Connection	Terminal1 PIN 3 (D-), Terminal1 PIN 4 (D+)

### ISOLATION

Input / Power Supply	1500 VDC
	Example. safe electrical isolation by reinforced insulation according to IEC/EN 61010 <sup>-1</sup> Rated insulation voltage 300 Veff test voltage 3 kV, 50 Hz, 1 min.

### ENVIRONMENTAL CONDITIONS

Operation Temperature	Temperature Limits $-20$ to $+60$ °C
Storage Temperature	Temperature Limits $-25$ to $+65$ °C

### MOUNTING

Mounting	On 35 mm DIN Mounting Rail Acc. to EN 60715:2001
----------	--

## SAFETY

MD-U1

### APPROVALS

IEC60079-0, IEC60079-11, IEC60079-15

FM & FM-C No.3024643,3029921C,conforms to Class 3600,3610,3611,3810

### LOCATION

Safe Area/Non-Hazardous Locations or Zone 2, Group IIC T4, Class I, Division 2, Groups A, B, C, D

Temperature Code T4 and Class I, Zone 2, Group IIC, IIB, IIA T4 installation.

### SAFETY DESCRIPTION

ATEX	II 1 G Ex ic [ia Ga] IIC T4 Gc, II 3 G Ex ic [ic] IIC T4 Gc, II 1 D Ex ic [ia IIIC Da] IIC Gc II 3 D Ex ic [ic IIIC Dc] IIC Gc
IECEX	Ex ic [ia Ga] IIC T4 Gc, Ex ic [ic] IIC T4 Gc, Ex ic [ia IIIC Da] IIC Gc, Ex ic [ic IIIC Dc] IIC Gc
North American Zones	Class 1, Zone 2 AEx ic [ia Ga] IIC T4 Gc, Class I, Zone 2 AEx [ic] IIC T4 Gc Zone 20 Ex ic [ia IIIC Da] IIC Gc, Zone 2 Ex ic [ic IIIC Dc] IIC Gc
North American Div	Class I, Division 2, Groups A, B, C, D T4, Class II, Division 2, Groups F, G

### ASSOCIATED ELECTRICAL APPARATUS

Vo/Voc	17.0 V, Io/Isc = 85 mA, Po/Po = 1.45 W
IECEX	24V, Ci = 6 nF, Li = 0 nH. Um = 30 V, -20 °C ≤ Ta ≤ 60°C.

# Universal Barrier

## ORDERING INFORMATION

MD-U1

### MD-UN

MD:

Modbus Compatible

U:

Universal Intrinsic Safety Barrier

N:

Number of Channels

1 : One Channel

2 : Two Channel

3 : Three Channel

## ORDERING INFORMATION

MD-U1 Universal Intrinsic safety barrier, 1 channel

MD-U2 Universal Intrinsic safety barrier, 2 channel

MD-U3 Universal Intrinsic safety barrier, 3 channel



[www.sagco.ca](http://www.sagco.ca)

HB Safety Automation Group  
#250 - 997 Seymour St.  
Vancouver, BC, Canada