

# Intrinsic Safety Barrier

Sink Analog ( Voltage)



# MD-AV2

Sink Analog Intrinsic Safety Barrier (Voltage)




- Support 2 Channels
- 24 VDC Supply
- Analog Signal Type
- Modbus RTU, RS-485 Interface
- Connection with Screw Terminals
- Configurable with Modbus Protocol
- Voltage Input

## Product Features



Voltage



Modbus  
RTU

Analog Input




**MD-AV** is an isolated barrier used for intrinsic safety applications that features up to three channels. Each channel measures in the voltage range of -5~5v, 0~5v, 0~10v, and -10~10v from the Hazardous area (Zone 0 or 1). It can be configured and transmitted with the MODBUS protocol RS-485 Interface on an integrated CPU, communicating with PLCs or PACs directly.

The **MD-AV** restricts the level of current and voltage accordingly, to prevent the risk of spark or ignition in a hazardous area. What's more, the barrier is equipped with a fault LED, so as to alert the user to short circuit and open circuit faults.


The current and power consumption of the input are about 208 mA and 5W respectively. The power dissipation is less than 1W, and it is mounted on a 35 mm DIN mounting rail acc. Moreover, the environmental conditions are -20 to +60 °C, and -25 to +65 °C as storage temperature.

# Front View

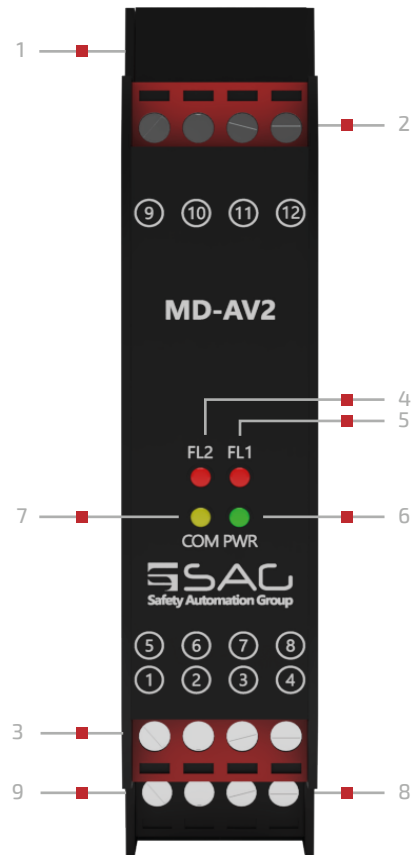

1. Cap
2. Analog Input : Channel 2
3. Analog Input : Channel 1
4. Fault LED Channel 2
5. Fault LED Channel 1
6. Power LED
7. Communication LED
8. RS-485 Interface
9. Power Supply Terminal

# Connection View

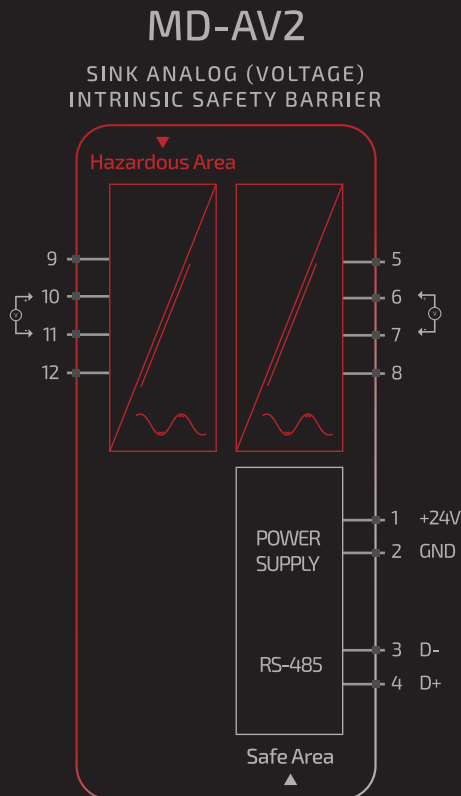

## MD-UT2 PIN Configuration

1. +24VDC	5. Channel 1
2. GND	6. Analog Input
	7. RTD,Thermocouple
	8.
3. RS-485 (D-)	9. Channel 2
4. RS-485 (D+)	10. Analog Input
	11. RTD,Thermocouple
	12.

# Sink Analog Barrier(Voltage)

## TECHNICAL DATA

MD-AV2

### GENERAL SPECIFICATION

Signal Type	Analog Input
Number of Channels	2 Channel

### SUPPLY

Rated Voltage	24 VDC Nom (20-30 VDC) Reverse Polarity Protected
Connection	Terminal 1 PIN 1(+24 VDC), Terminal 1 PIN 2 (GND)
Power Dissipation	< 1 W
Current Consumption	Approx. 208mA
Max. Power Consumption	5 W

### INPUT

Input	Voltage
Connection	Terminals 2,3
Rated Values	-
Integration Time	400 ms
Input Range	(sink, -10 to 10 volts)

### VOLTAGE

Range	0 ... 10 V, 2 ... 10 V, 0 ... 1 V, -100 ... 100 mV, -10 ... 10V
Resolution	-

### DEVIATION

Voltage	0.1 % of Span
---------	---------------

### DATA CONNECTION

Modbus RTU	RS-485 connection up to 115.2 kbps for Monitor/ Configuration
Connection	Terminal1 PIN 3 (D-), Terminal1 PIN 4 (D+)

### MOUNTING

Mounting	On 35 mm DIN Mounting Rail Acc. to EN 60715:2001
----------	--

### ISOLATION

Input / Power Supply	1500 VDC Example. safe electrical isolation by reinforced insulation according to IEC/EN 61010 <sup>-1</sup> Rated insulation voltage 300 Veff test voltage 3 kV, 50 Hz, 1 min.
----------------------	---

### ENVIRONMENTAL CONDITIONS

Operation Temperature	Temperature Limits -20 to +60 °C
Storage Temperature	Temperature Limits -25 to +65 °C

# Sink Analog Barrier(Voltage)

## TECHNICAL DATA

MD-AV2

### APPROVALS

IEC60079-0, IEC60079-11, IEC60079-15

FM & FM-C No.3024643,3029921C,conforms to Class 3600,3610,3611,3810

### LOCATION

Safe Area/Non Hazardous Locations or Zone 2, Group IIC T4, Class I, Division 2, Groups A, B, C, D

Temperature Code T4 and Class I, Zone 2, Group IIC, IIB, IIA T4 installation.

### SAFETY DESCRIPTION

ATEX Ex ic [ia Ga] IIC T4 Gc, Ex ic [ic] IIC T4 Gc, Ex ic [ia IIIC Da] IIC Gc, Ex ic [ic IIIC Dc] IIC Gc

IECEX Ex ic [ia Ga] IIC T4 Gc, Ex ic [ic] IIC T4 Gc, Ex ic [ia IIIC Da] IIC Gc, Ex ic [ic IIIC Dc] IIC Gc

North American Zones Class 1, Zone 2 AEx ic [ia Ga] IIC T4 Gc, Class I, Zone 2 AEx [ic] IIC T4 Gc  
Zone 20 Ex ic [ia IIIC Da] IIC Gc, Zone 2 Ex ic [ic IIIC Dc] IIC Gc

North American Div Class I, Division 2, Groups A, B, C, D T4, Class II, Division 2, Groups F, G

### ASSOCIATED ELECTRICAL APPARATUS

Vo/Voc 17.0 V, Io/Isc = 85 mA, Po/Po = 1.45 W

IECEX 24V, Ci = 6 nF, Li = 0 nH. Um = 30 V, -20 °C ≤ Ta ≤ 60°C.

## ORDERING INFORMATION

### MD-AV N

MD:

Modbus Compatible

AV:

Sink Analog Intrinsic Safety Barrier (Voltage)

Number of Channels

1: One Channel

2 : Two Channel

3 : Three Channel

### ORDERING INFORMATION

MD-AV1 Sink Analog Intrinsic Safety Barrier (Voltage), 1 channel

MD-AV2 Sink Analog Intrinsic Safety Barrier (Voltage), 2 channel

MD-AV3 Sink Analog Intrinsic Safety Barrier (Voltage), 3 channel



[www.sagco.ca](http://www.sagco.ca)

HB Safety Automation Group  
#250 - 997 Seymour St.  
Vancouver, BC, Canada  
V6B 3M1